


FIREPLACE INSERT OPTIM V7 in accordance with EN 13 229 - W

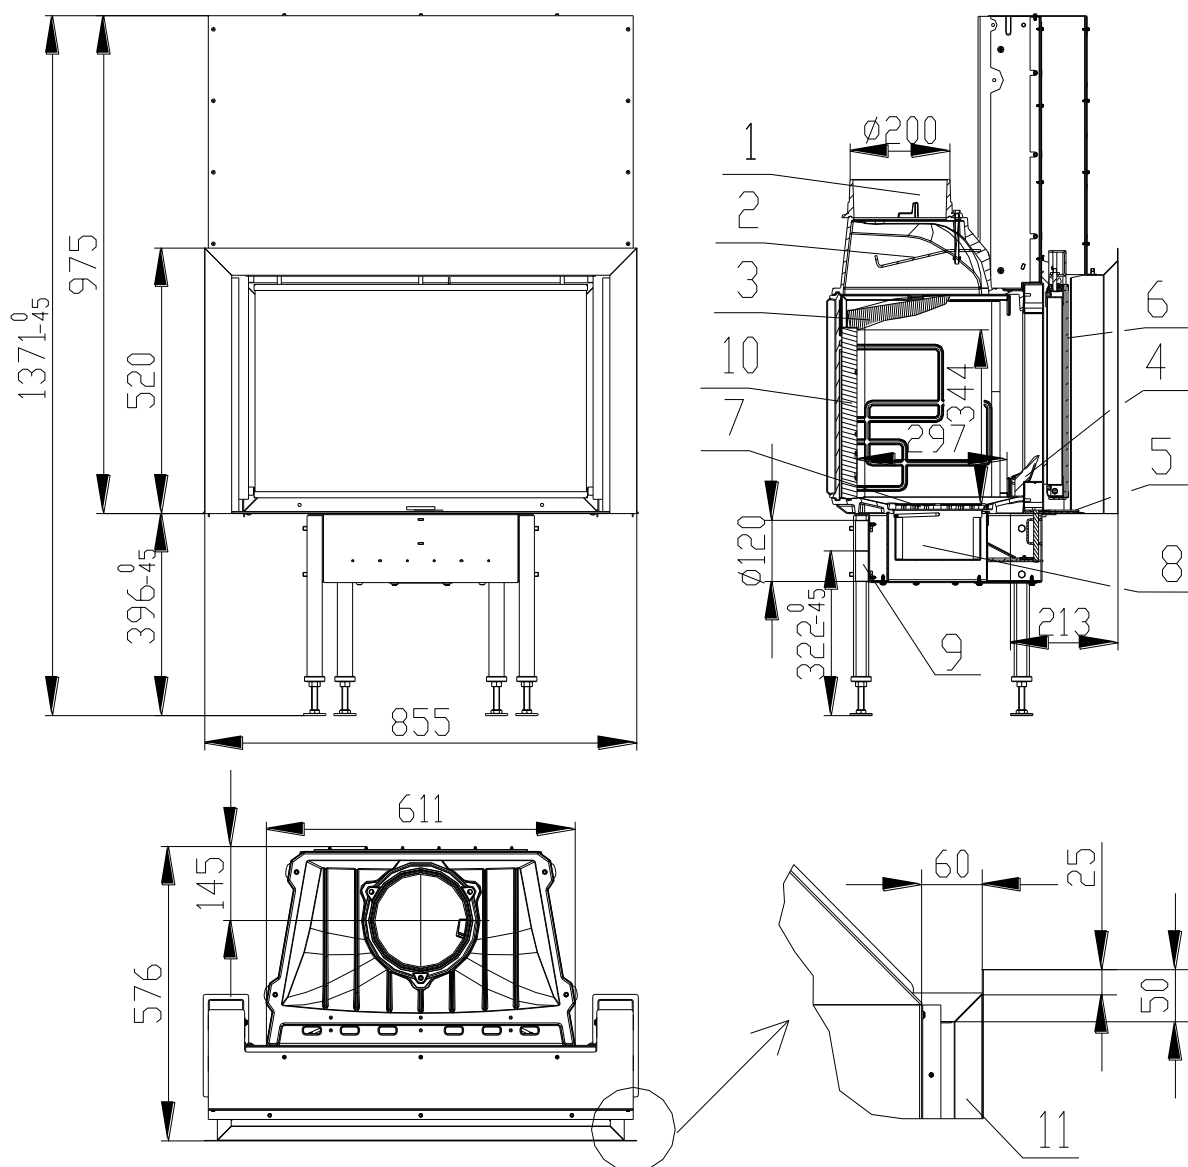


- 1.Flue bellmouth**
- 2.Deflector**
- 3.Deflector Carcon**
- 4. Barrier**
- 5.Inlet regulativ**
- 11.Frame**

- 6. Glass**
- 7. Grate**
- 8. Ash Tray**
- 9. External air input**
- 10. Refractory concrete Carcon**

Technical data:

		Closed firebox
Nominal heat output	kW	8,5
Efficiency	%	79
Volume flow of combustion products	g/s	7,8
Flue-gas temperature	°C	345,4
Min. feed pressure at nom. heat output	Pa	10
Fuel	Wood (beech logs)	
Fuel consumption per hour	kg/h	2,5
CO emission in burnt gas (in relation to 13% O ₂)	%	0,074
Smoke flue diameter	mm	200
Weight	kg	183

Refractory concrete Carcon

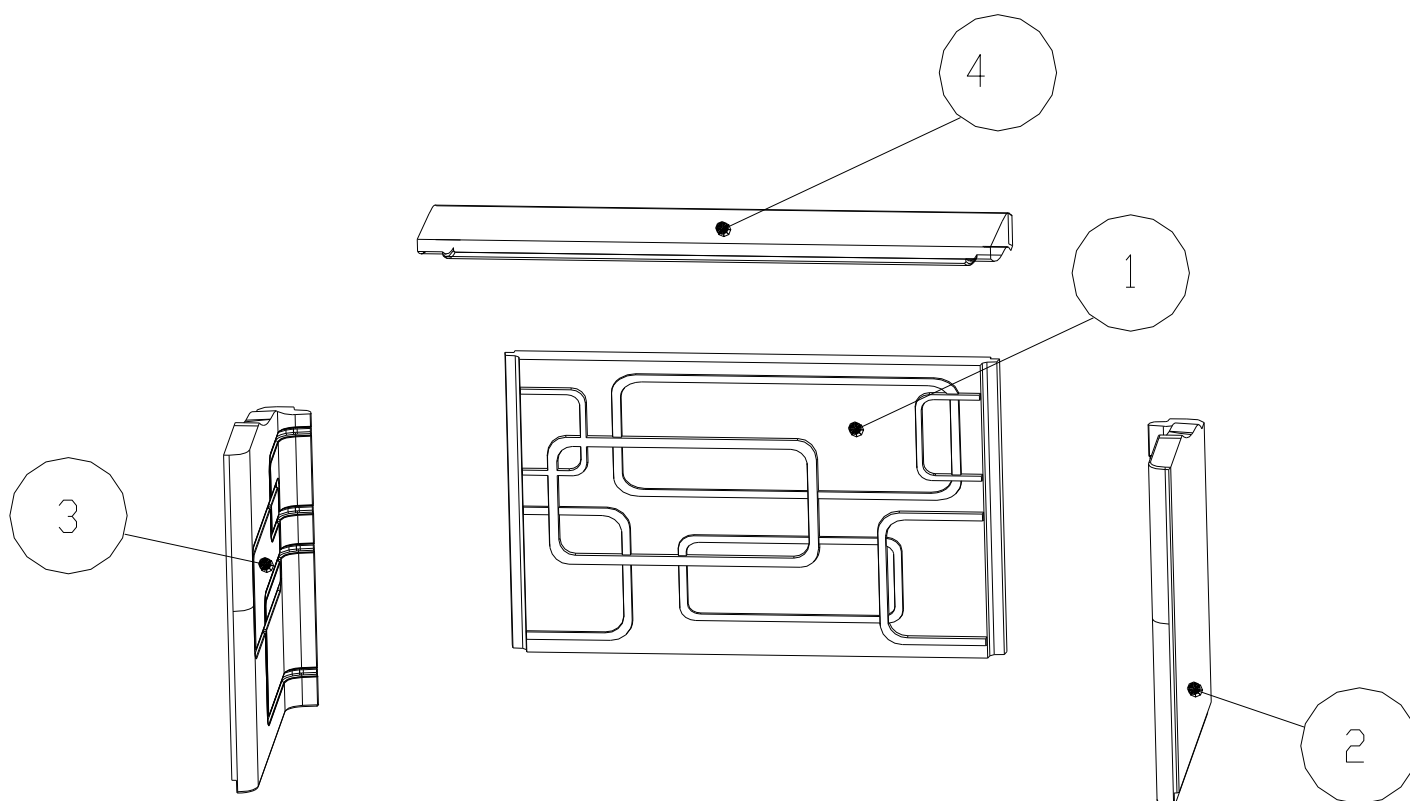

- 1 – Back Side
- 2 – Right Side
- 3 – Left side
- 4 – Deflektor

BeF Home, s.r.o. Kotvrdovice 277 679 07 Kotvrdovice IČO: 25524682	BêF home	CE	10
Type: OPTIM 7 Version: 7, V7 Test number: 30-10696/30-10283/1 Notified person: 1015 EN 13229 Heat output: 8,5 kW capacity for heating Efficiency: 79 % CO emission in burnt gas (in relation to 13% O ₂): 0,074 % Burnt gas temperature: 345,4 °C Distance from adjacent combustible materials: 8cm + 10cm thermal insulation			
Fuel: wood (beech logs) Wood-burning fireplace insert for room heating.			
Peruse and keep service instructions! Appliance with short-term combustion process!			

¹⁾ For details see Installation and Service Instructions