


FIREPLACE INSERT INTER V8CP in accordance with EN 13 229 - W

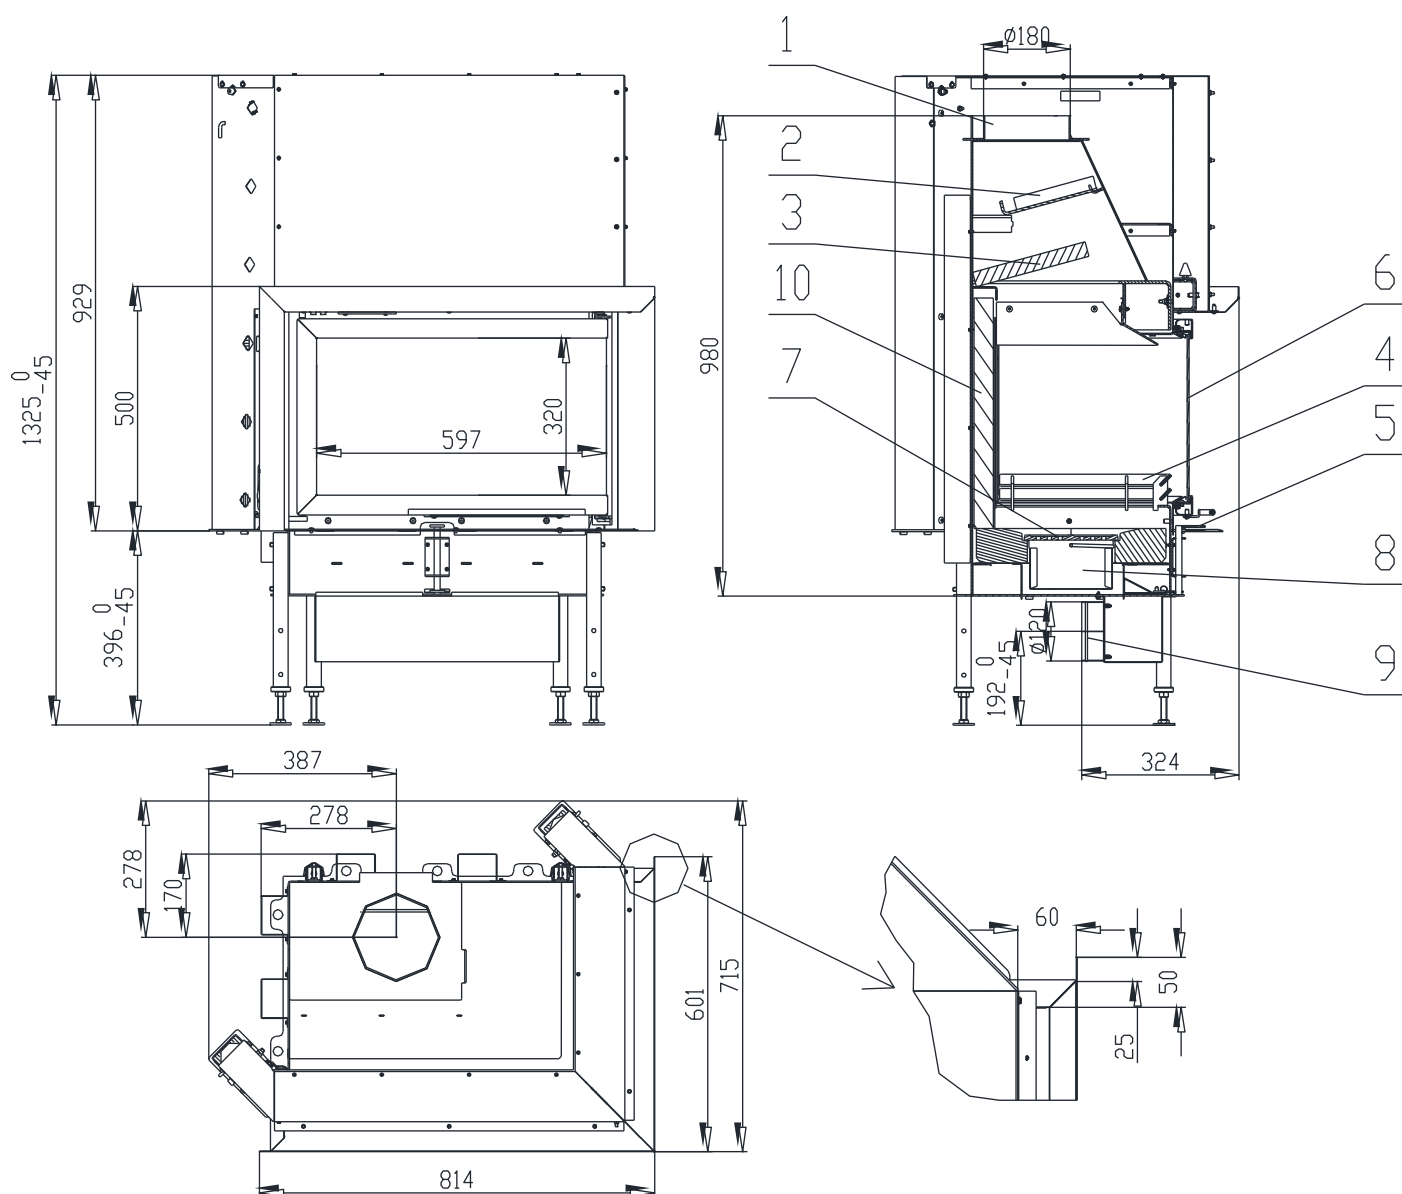

1.Smoke flue bellmouth

2.Deflector

3.Deflector Carcon

4.Barrier

5.Inlet regulativ

6. Glass

7. Grate

8. Ash Tray


9. External air input

10. Refractory concrete Carcon

Technical data:

Nominal heat output	kW	13
Efficiency	%	80
Volume flow of combustion products	g/s	10,2
Flue-gas temperature	°C	280
Min. feed pressure at nom. heat output	Pa	10
Fuel	wood (beech logs)	
Fuel consumption per hour	kg/h	3,8
CO emission in burnt gas (in relation to 13% O2)	%	0,067
Smoke flue diameter	mm	180
Weight	kg	220

Assembly of a fire-brick firebox:

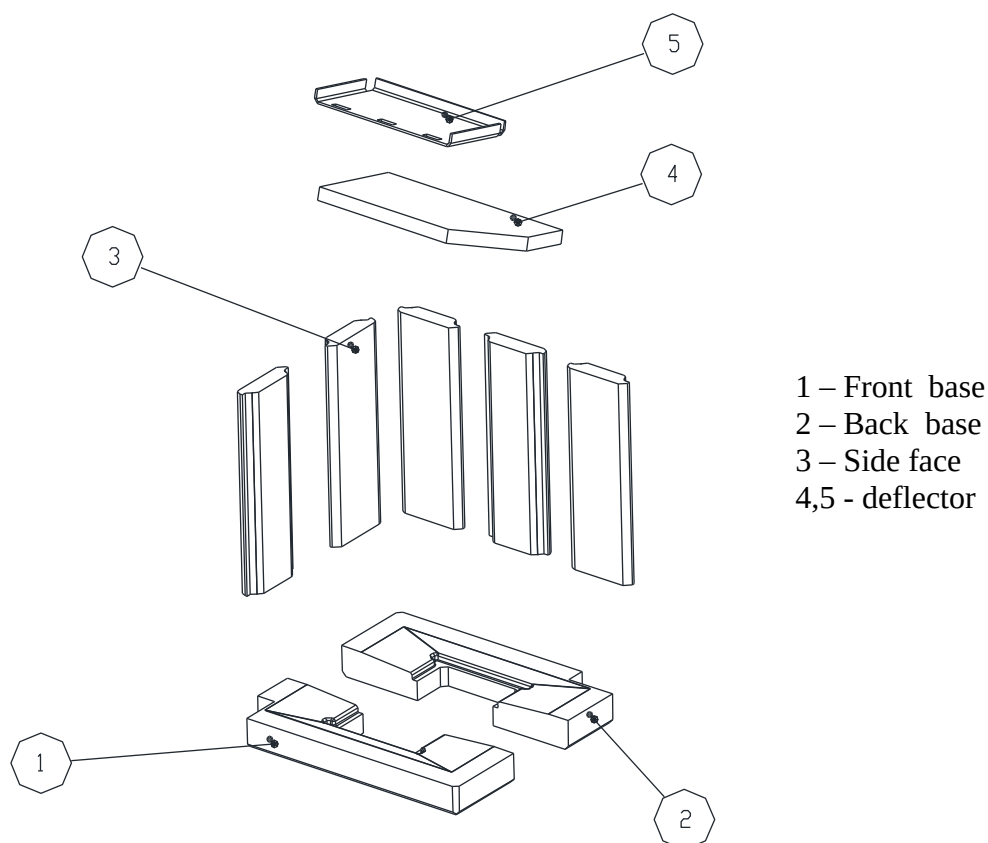

BeF Home, s.r.o.

Kotvrdovice 277

679 07 Kotvrdovice

IČO: 25524682

BêF
home



12

Type: **INTER 8**

Version: **8, V8, V8CL, V8CP, V8C, 8CP, 8CL, 8C**

Test number: **30-11485/1**

Notified person: **1015 EN 13229**

Heat output: **13 kW capacity for heating**

Efficiency: **80 %**

CO emission in burnt gas (in relation to 13% O₂): **0,067 %**

Burnt gas temperature: **280 °C**

Distance from adjacent combustible materials: **8cm + 10cm thermal insulation**

Fuel: **wood (beech logs)**

Wood-burning fireplace insert for room heating.

Peruse and keep service instructions!

Appliance with short-term combustion process!

¹⁾ For details see Installation and Service Instructions