


FIREPLACE INSERT INTER V9CP in accordance with EN 13 229 - W

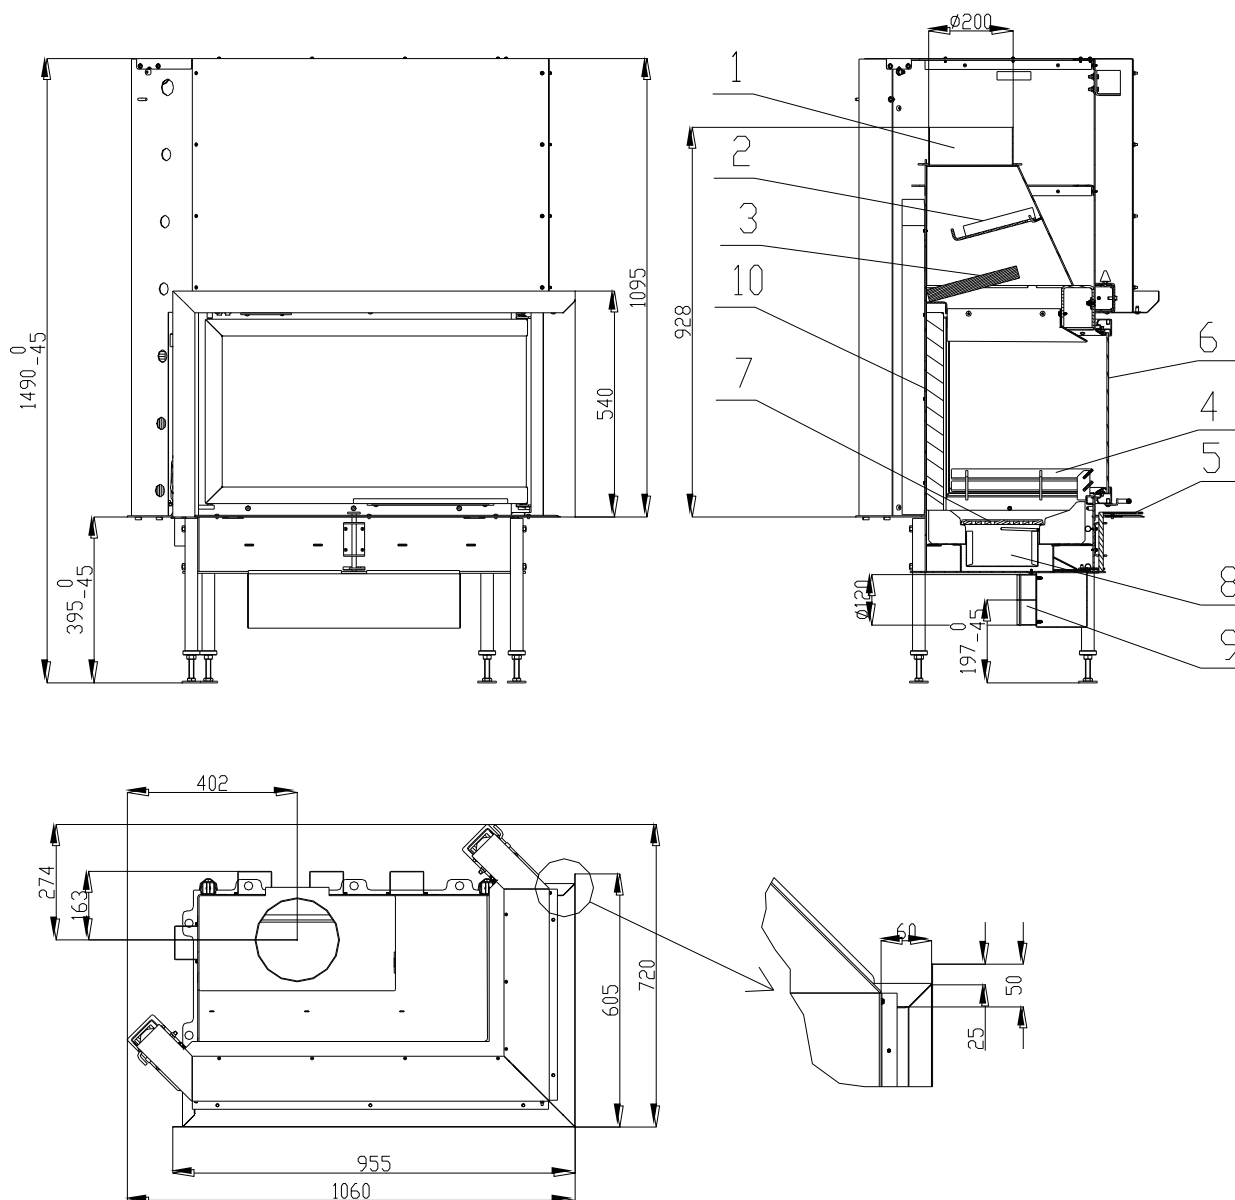


- 1. Smoke flue bellmouth**
- 2. Deflector**
- 3. Deflector Carcon**
- 4. Barrier**
- 5. Inlet regulativ**
- 11. Frame**

- 6. Glass**
- 7. Grate**
- 8. Ash Tray**
- 9. External air input**
- 10. Refractory concrete Carcon**

Technical data:

Nominal heat output	kW	14,5
Efficiency	%	84
Volume flow of combustion products	g/s	10,2
Flue-gas temperature	°C	302
Min. feed pressure at nom. heat output	Pa	10
Fuel	wood (beech logs)	
Fuel consumption per hour	kg/h	3,6
CO emission in burnt gas (in relation to 13% O ₂)	%	0,09
Smoke flue diameter	mm	200
Weight	kg	212

Assembly of a fire-brick firebox:

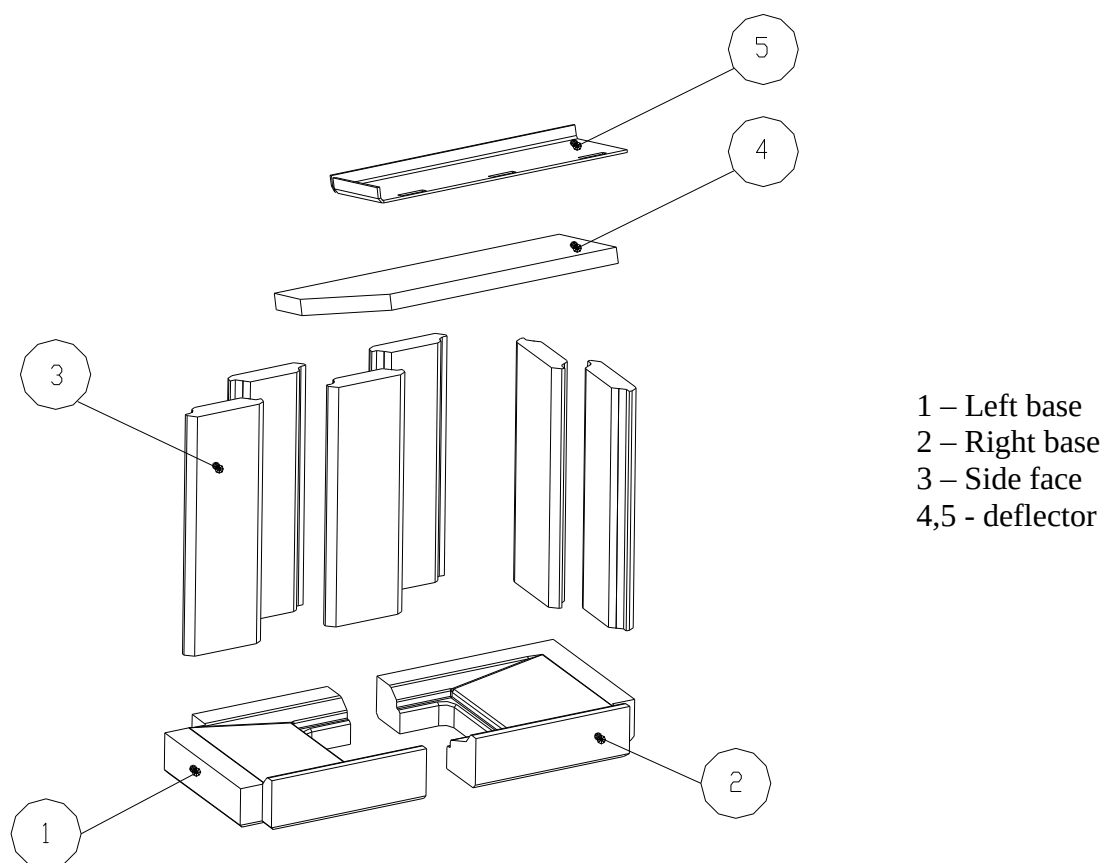

BeF Home, s.r.o.

Kotvrdovice 277

679 07 Kotvrdovice

IČO: 25524682

BêF
home



12

Type: **INTER 9**

Version: **9, V9, V9CL, V9CP, V9C, 9CP, 9CL, 9C**

Test number: **30-11496**

Notified person: **1015 EN 13229**

Heat output: **14,5 kW capacity for heating**

Efficiency: **84 %**

CO emission in burnt gas (in relation to 13% O₂): **0,09 %**

Burnt gas temperature: **302,3 °C**

Distance from adjacent combustible materials: **8cm + 10cm thermal insulation**

Fuel: **wood (beech logs)**

Wood-burning fireplace insert for room heating.

Peruse and keep service instructions!

Appliance with short-term combustion process!

¹⁾ For details see Installation and Service Instructions