
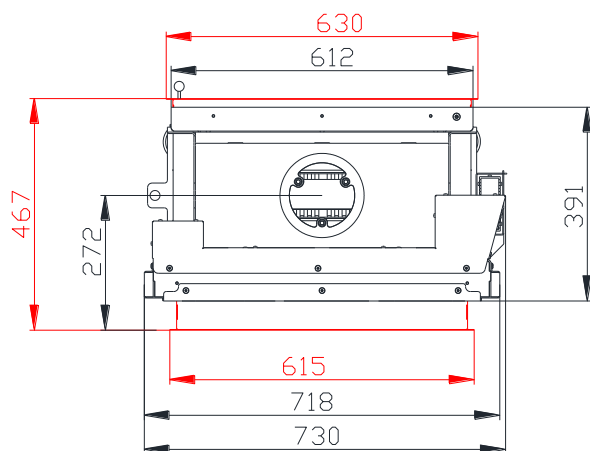


Technical drawing of the front view of a BEF 1500-40 truck. The drawing shows a white cab with a large 'BeF' logo on the front. The overall height is 1505+60 mm. The height of the upper section is 1060 mm. The height of the lower section is 445+60 mm. The width of the lower section is 218-40 mm. The front axle has a diameter of 120 mm. The drawing is labeled 'BEF 1500-40' and 'Front view'.

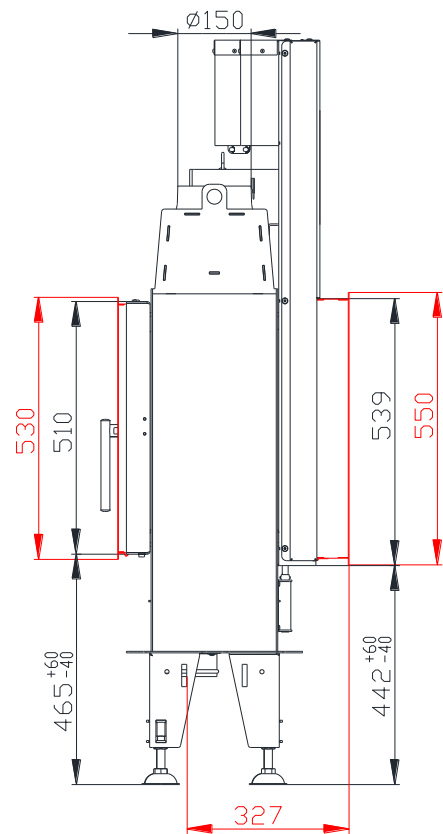


FIREPLACE INSERT BEF FLAT V 6 TWIN

IN ACCORDANCE WITH EN 13 229

Technical data:

Nominal heat output	kW	5
Efficiency	%	84
Volume flow of combustion products	g/s	4,3
Flue-gas temperature	°C	206
Min. feed pressure at nominal heat output	Pa	12
Fuel	wood (beech logs)	
Fuel consumption per hour	kg/h	1,53
CO emission in burnt gas (in relation to 13% O2) %		0,0946
Dust in flue-gas (in relation to 13% O2) mg/Nm ³		17
Smoke flue diameter	mm	150
Weight	kg	157

Set of carcon firebox:

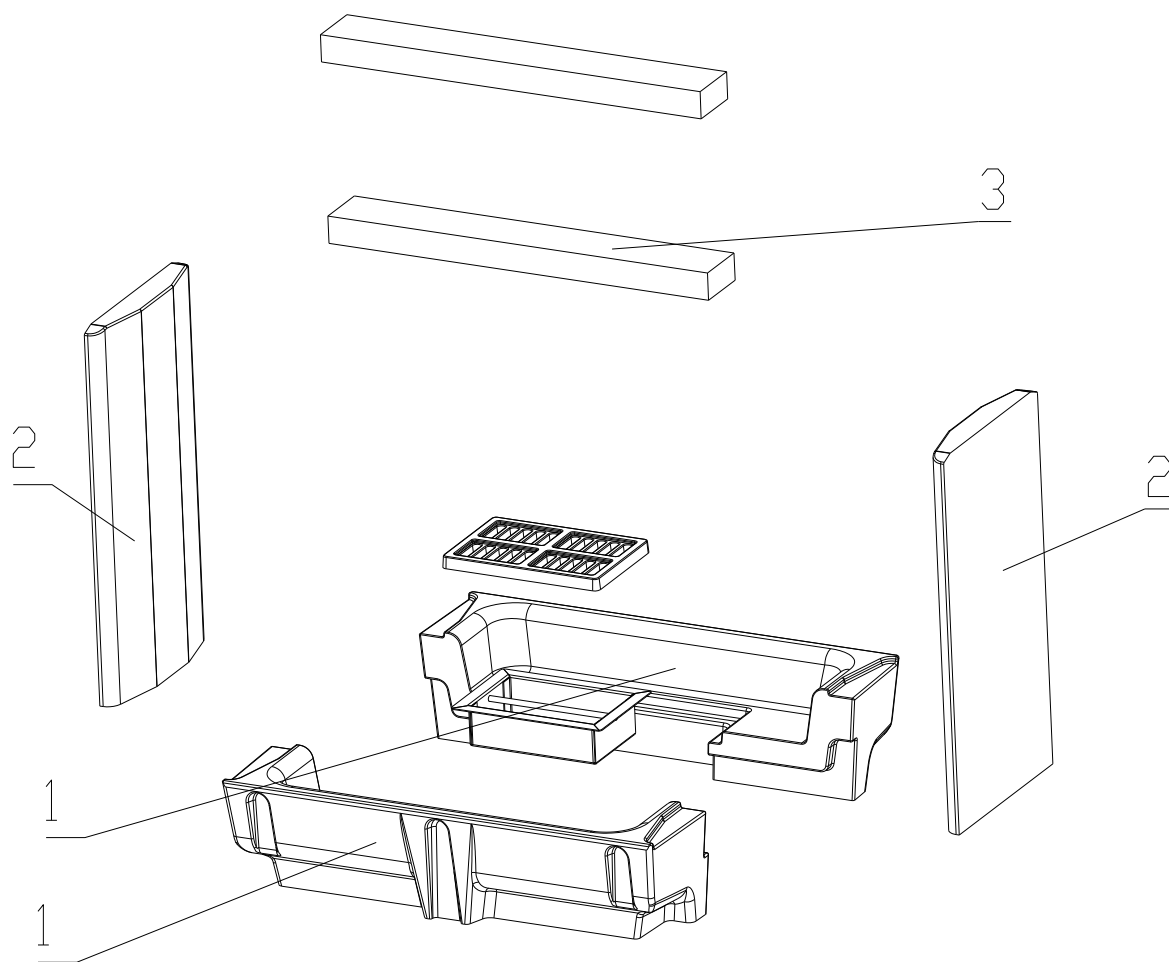

List of spare parts:

1. Bottom
2. Side piece
3. Deflector
4. Cast iron grate
5. Ashtray

For details see Installation and Service Instructions.